



76\$ 9

129

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD

76\$ 9



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYYHYURQHW DJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLQDQH QZDYH VXSHULP&QDHYGRS&GLRGH		,) 60		\$
2SHUDMXLQDQGRWRUDJH WDESHUDW XOH 767			5 WR	f &
7\SLFDO WIKWULP&DQFH	'2 \$'	5\$-&	2	f & :
,QVWDQWDQHRROWRDUZDUG\$ SHGLRGH		9)	7<3	0\$;
	7- f &			
	,) \$		7- f &	
,QVWDQWDQHRXUUSHOMRQW UDWHYHYURQHW DJH	7- f &	,5		X\$
	7- f &			P\$

1RWHV

3XOVH WHV&XOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPWH ZLGWK 0



76\$ 9 5HY

:RUOG ,QWH&QLDQWLRLQDHO

RATINGS AND CHARACTERISTICS CURVES


7\$

f & X Q O H V Q R W K B U Z L V H

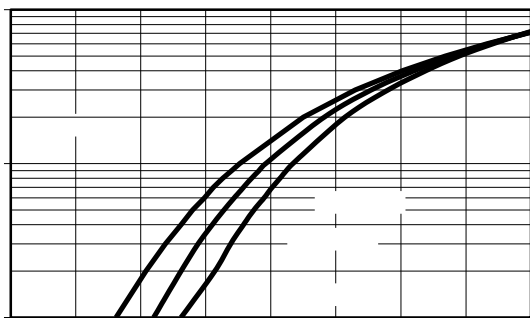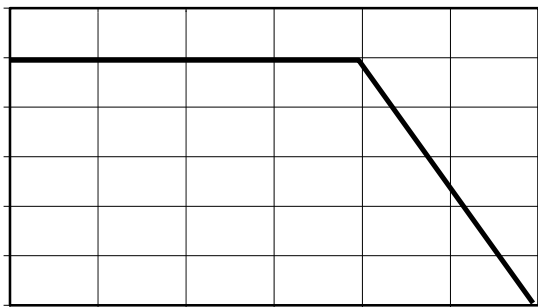

PACKAGE OUTLINE DIMENSIONS

DO-201AD

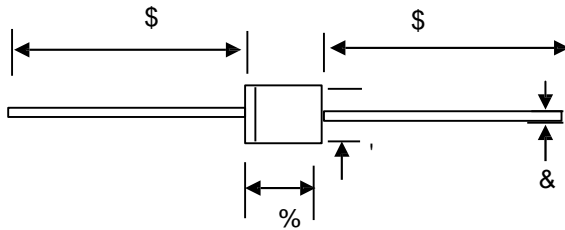


'2 \$' PHFKD QLFWD

81,7		\$	%		'
PP	PD[			4	
	PLQ			1	
PLO	PD[				
	PLQ				

**AUf\_]b[ '=bZcf a Uh]cb**

& D W K R G H



Anode

①Product model : TSA5V45

②PDC information

Y X WW

WW:Week code(01 to 53)


X:Internal identification code

Y:Year code(ex:0=2020)

**Packaging Information**

1.Inside Box

2.Outside Box

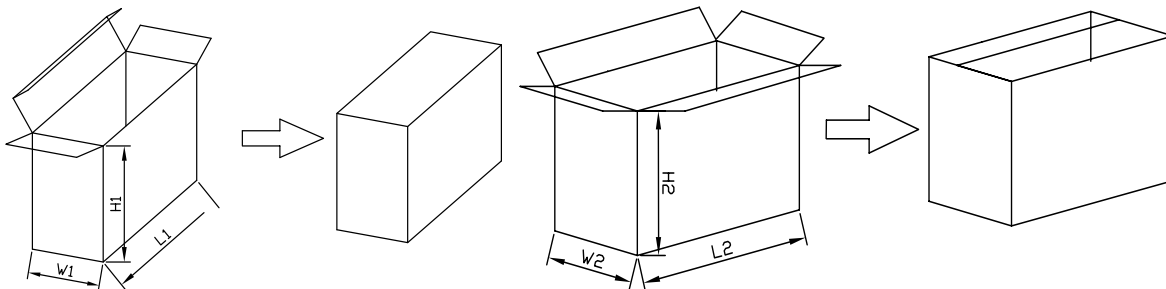

**Packaging Information**

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	1115	415	210	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	20mm,±3mm; 21-100mm,±5mm;		101-500mm,±10mm			