

76\$ /  
OD\

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA /



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$\$ '&\$GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQW DJH		9550		9
0D[LXPYPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDURSUHQW VLQDQHQZDYH VXSHULPBRQDURHSHGLRGH		,) 60		\$
2SHUDMXQEDQQRWRUDJH WHPSHUDW		XUH 007CJH	5 WR	f &
7\SLFVQCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQHURQW UDWHYHYURQW DJH	7- f &	,5		X\$
	7- f &			P\$

1RWHV


3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0




RATINGS AND CHARACTERISTICS CURVES 7\$ f & XQOHVQRWKB UZLVH

, I \$ Y H U D R H Z B X U U \$ Q W

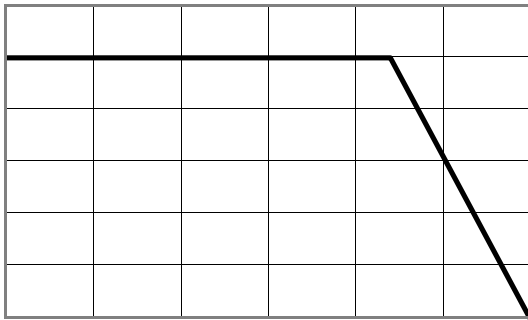


7 F & D V H<sup>2</sup> & 7 H P S

Current Derating, Case

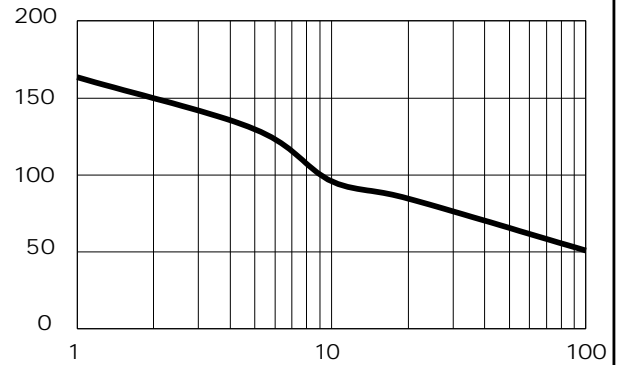

Maximum Repetitive Surge Current


, I , Q V W D O W B D Z B R X U U \$ Q W

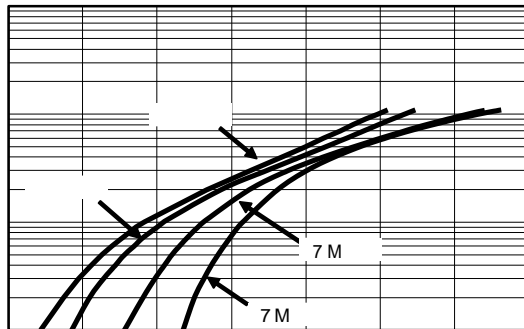

9 I , Q V W D Q W D Q H R X V ) R U Z D U G


Typical Forward Voltage

, U 5 H Y H L & X H U U H X C S W

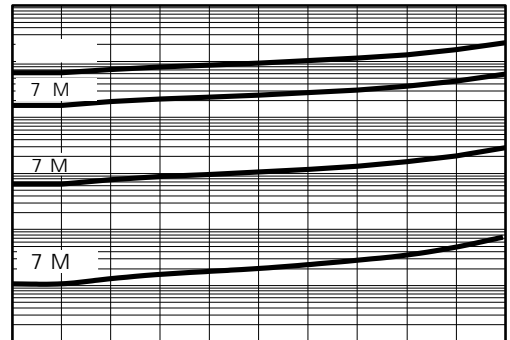

9 R O W D J H B 8 5 H Y H U V H 9 R O W D J H 9 R O W


Typical Reverse Current

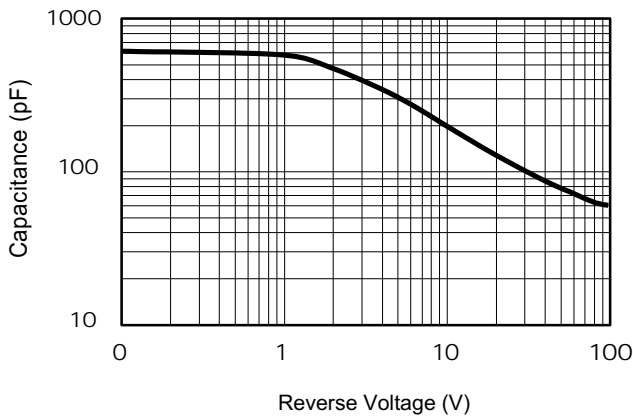

d Ç % 0 ] o : μ v š ] } v % 0 ] š v

**PACKAGE OUTLINE DIMENSIONS**

**DO-201AD**

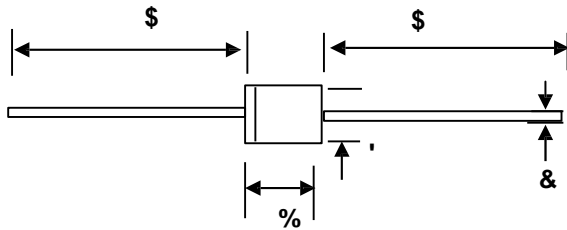


**'2 \$' P H F K D QGLFW D**

81,7		\$	%		'
PP	PD[			4	
	PLQ			1	
PLO	PD[				
	PLQ				


0DUNLQJ ,QIRUPDWLRQ

&DWKRGH



\$QRGH


73URGXFW P&GHO  
83'& LQIRUPDWLRQ



DWU ] b[ ' =bZcf aUh] cb

% =bg| XY 6cl

&' G hg| XY 6cl

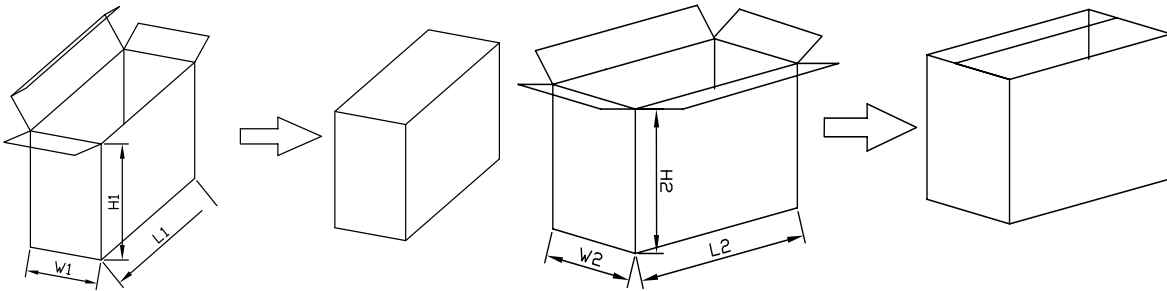

DWU ] b[ ' =bZcf aUh] cb

BC	I B-H	% =bg  XY 6cl			G hg  XY 6cl		
G nY	aa	@%	K%	<%	@&	K&	<&
		&)	+) )	%			