



76 \$ /100

129

Features

DO-201AD  
TSA5L100



Applications



Cathode  Anode

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)


				15	
				2	

0


## RATINGS AND CHARACTERISTICS CURVES

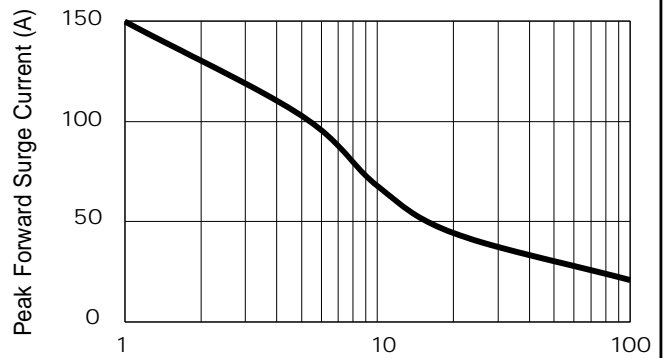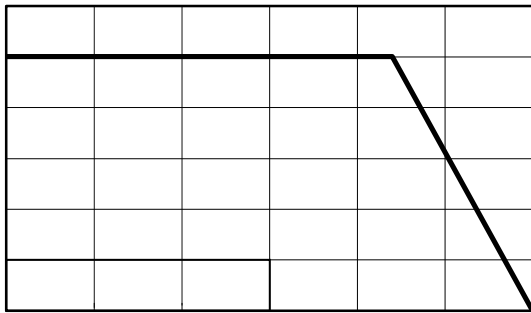


Current Derating, Case

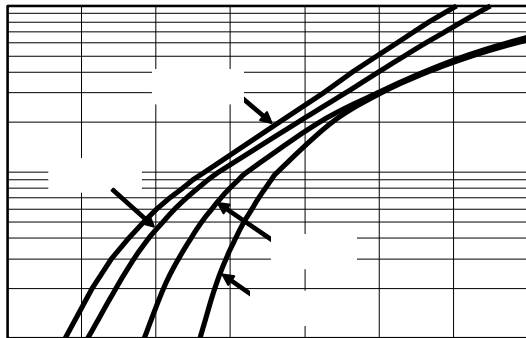

Maximum Repetitive Surge Current

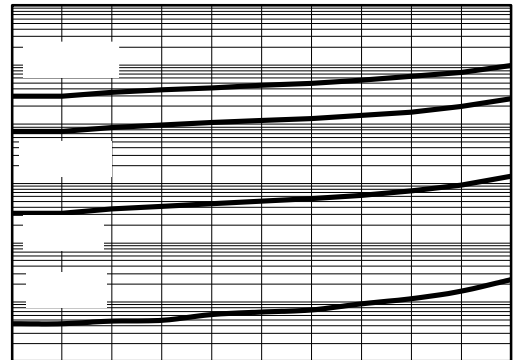

Typical Forward Voltage

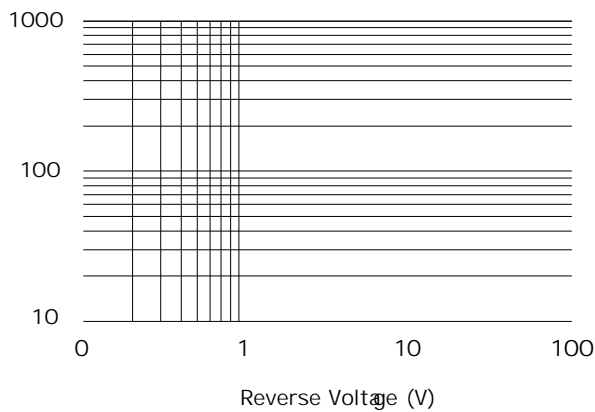


Typical Reverse Current

Typical Junction Capacitance

## PACKAGE OUTLINE DIMENSIONS

### DO-201AD



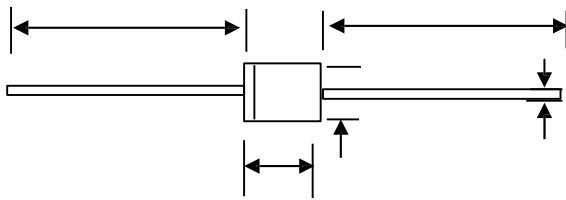


				C	
				1.4	
				1.1	
				5.1	

0DUNLQJ ,QIRUPDWLRQ

7

5L100

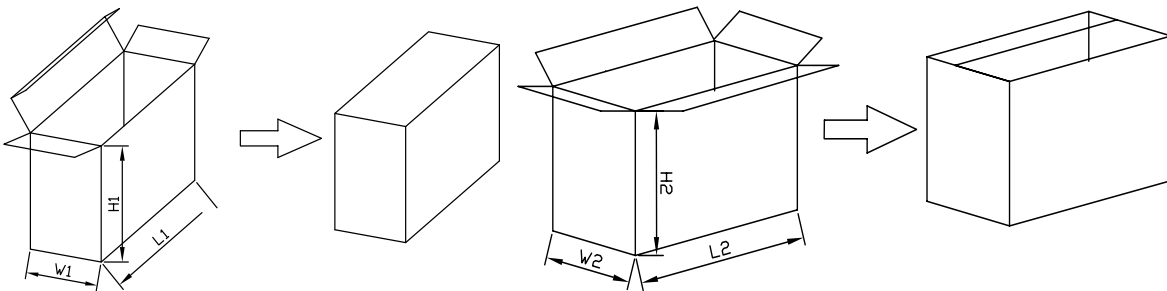

				4	4		