

TS \$3L

19-NOV-201 SD 11H

7 U H Q F K 0 2 6 % D U U L H U 6 F K R W W N \ 5 H




'2
 '2 \$ &

Features

- ‡ \$ G Y D Q W H G W F K K Q R O I
- ‡ / R Z I R U Z Y B G V G D J R S
- ‡ / R Z S R Z I U R V V H V
- ‡ + L J K I I L F L R I S F U D W L R C
- ‡ / H D J G H H L Q L S R K + & R P S C

Applications

- ‡ ' & ' & R Q Y H
- ‡ \$ & ' & G D S W






Cathode  Anode

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

3 D U D P H W H U		6 \ P E R	/ L P L W		8 Q L
0 D [L P X P H S H V S H W L Y Y H Y R O W D J H		9 5 5 0			9
0 D [L P X P Y H U D R J H Z D W G W F L X I U H G I Q W) \$ 9			\$
M R U Z N D U G) 6 0			\$
2 S H U D M X Q B D V L V R U W H I P S H U D D X U H		7- 7 6 7 *	W R		&
<small>① P S I Q U A D S (V E H) P K - Q X C Z 1 4 7 1 1 2 P & F : D O R - M Z</small>					
, Q V W D Q W B Q Z I R K W) \$	7 - f &	9)	7 < 3	0 \$;
) \$	7 - f &			

1 R W H V
 3 X O W H H V W V S X O Z I H G W K G X W \ F
 3 X O W H H Y X O Z I H G W K P V

RATINGS AND CHARACTERISTICS CURVES

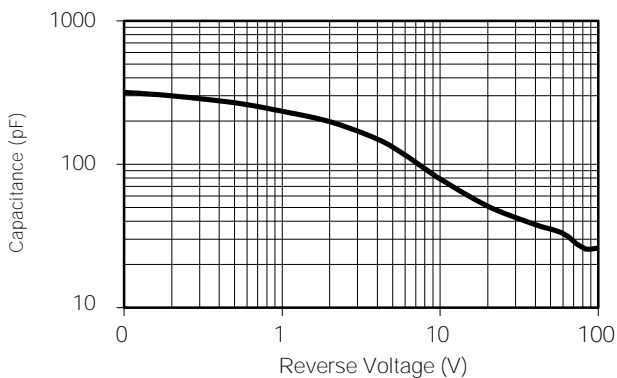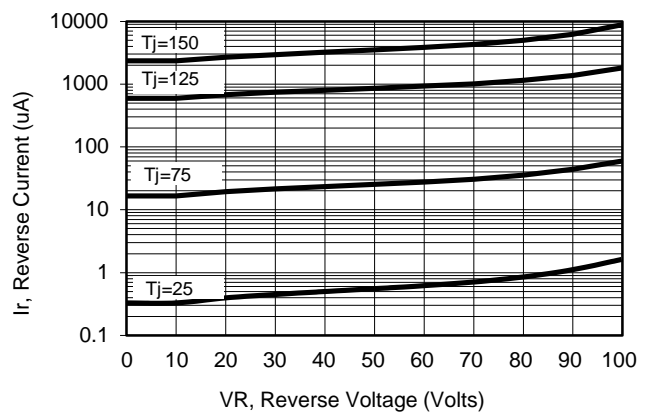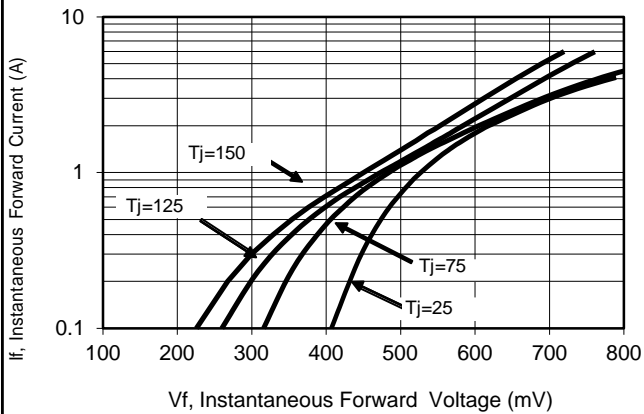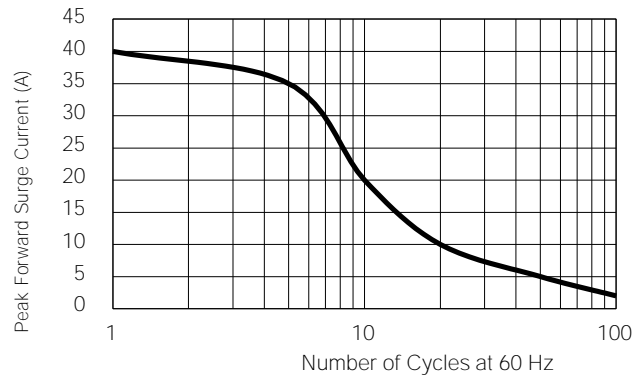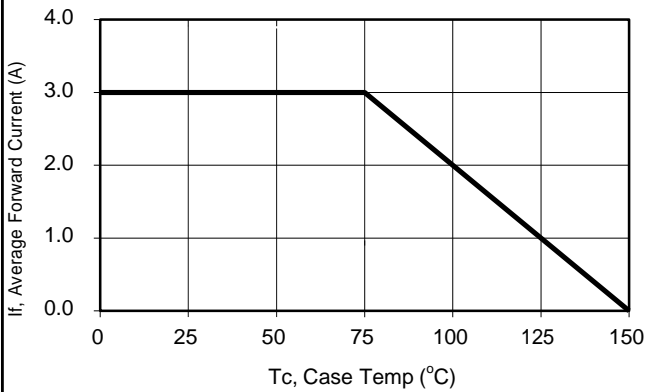

PACKAGE OUTLINE

'2 GLPHQVLRQV

